

GRASSY PAVER HD

By Premier Concrete Products, Inc.

4" Thick • 5,000 PSI • 16" x 24"



Grassy Paver HD by Premier Concrete Products, Inc. is a high compressive strength (5,000 psi) concrete paver unit utilized in heavy equipment yards. Grassy Paver HD exhibits a lattice style design forming a continuous similar pattern when pavers are installed contiguously. Grassy Paver HD exhibits a flat top surface which provides a smooth rideable surface once installed properly.

Grassy Paver HD is cast in a mold with ample open area, creating void areas within the paver unit. These voids may be infilled with an engineered topsoil mix or a well graded drainage aggregate, like pea gravel or #57 stone. This open area makes Grassy Paver HD an exceptional choice when a permeable paving surface is desired.

Whether the **Grassy Paver HD** surface is vegetated or infilled with drainage aggregate, either choice provides exceptional stormwater runoff collection options, and reduces overall stormwater concerns in urban areas.

Grassy Paver HD can be designed for varying frequencies of traffic, taking into account the strength of the onsite soil sub grade. A minimum of 4" of flexible base or gravel (#57 stone) should be placed on top of the recommended BaseLok® FabGrid® Geocomposite system or Geotextile Fabric, then compacted. **(A BaseLok® FabGrid® Geocomposite system is recommended in higher traffic areas. Use of a geocomposite system will reduce the possibility of differential settlement and/or possible wheel rutting in higher traffic areas).** At the very least, installation of a Non-Woven 8 oz. Geotextile Separator Fabric is recommended at the interface of the soil sub-grade and the recommended gravel (#57 stone) or flexible base. Once the aggregate has been installed and compacted on either the BaseLok® Geocomposite System or Geotextile Fabric, a 2" thickness of concrete sand will be placed prior to placement of Grassy Paver HD Units.

Grassy Paver HD is manufactured from a no slump concrete mix at our state-of-the art production facility. Each paver unit exhibits a minimum compression strength of 5,000 psi, and a water absorption maximum of 7%. The 5,000 psi high strength block is ideal for heavy duty truck and equipment parking.

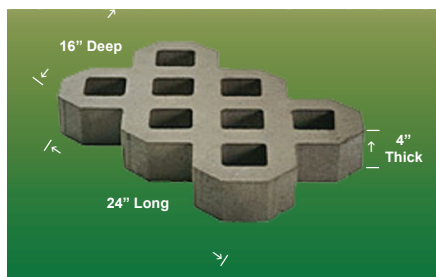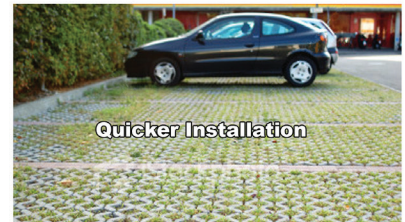

Grassy Paver Dimensions:	4" H x 24" W x 16" D
Sq. Ft. Per Paver:	2.67 Sq. Ft. per paver
Pavers Per Pallet:	40 pieces/pallet
Sq. Ft. Per Pallet:	107 Sq. Ft. Per Pallet
Compressive Strength:	5,000 PSI Min.

PREMIER-CONCRETE.COM
225 667 4545 | 800 575 7293

PREMIER
CONCRETE PRODUCTS
Proudly Manufacturing Concrete
Products for Over 25 Years