




Louisiana Plant 38200 Hwy 16 Denham Springs LA 70706

Texas Plant 5102 Galveston Road Houston TX 77017

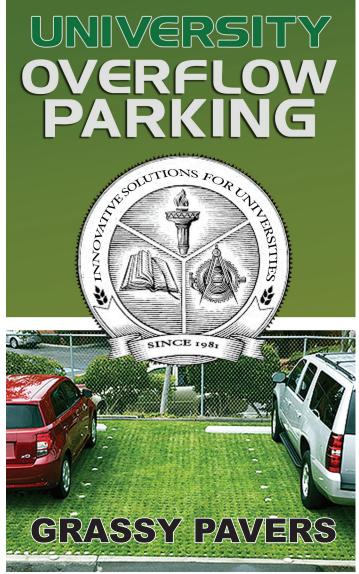


PREMIER CONCRETE PRODUCTS

Manufactured in Louisiana & Texas

U.S. POSTAGE
PAID
BATON ROUGE, LA
PERMIT NO.
504











Size: 16" x 4" x 24"

S.F. per block: 2.67

Pavers per Pallet: 35 pc

S.F. per Pallet: 93.5





More Cost Effective than Conventional

Grassy Pavers, made with a lattice design have a flat surface that

void allows for on-site infiltration of stormwater and revegetation. Designs can use topsoil and grass or aggregates in the grid openings depending upon desired effect.

The concrete grid stone reinforces grassy areas that are subject to

so compacted that the permeability of the soil structure is inhibited to

the point. Grassy Pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Grassy Pavers have an ASTM compressive

strength of 1,900 psi, and a water

absorption maximum of 7%

wheeled or vehicular traffic.

Typically an area that undergoes
repeat vehicular traffic will become

forms a continuous pattern of concrete when installed. The open

Concrete



GRASSY PAVERS